




cirru§creens

Instruction Manual of 7MM Fixed Frame Screen (4P)

Part List

	2 (2)	 4 (6)  M5*40 2 (3)  16 (16)  M5*6 16 (20)  10 (12)
	2 (2)	
	2 (2)	
	2 (2)	
	1 (1)	
 Micro fiber cloth  Film sheet X1 	2 (2)	 M5*40 2 (3)  M5*6 2 (3)  2 (3)
 	2 (2)	 4 (5)  4 (5)  M5*6 32 (36)
		 2 (3)  M5*8 2 (3)

Remark: Above spare parts quantity inside () is equipped.

IMPORTANT: BEFORE YOU BEGIN

To avoid staining or scratching the screen, wash your hands and clean the work area before starting. Do not use knives or sharp objects to open the packing boxes.

Care and Cleaning

Clean the screen with a microfiber cloth only. DO NOT use soap, water, harsh detergents, chemicals, distilled spirits or petroleum-based chemicals to clean the screen. Doing so may result in severe damage to the screen or the frame coating.


Use a household vacuum cleaner with a brush or furniture cleaning attachment to clean the felt frame material. Avoid using excessive amounts of water on the felt.

Installation

1-1. One-hole Nut

Slide 6pcs one-hole nuts into each long frames.


1-1

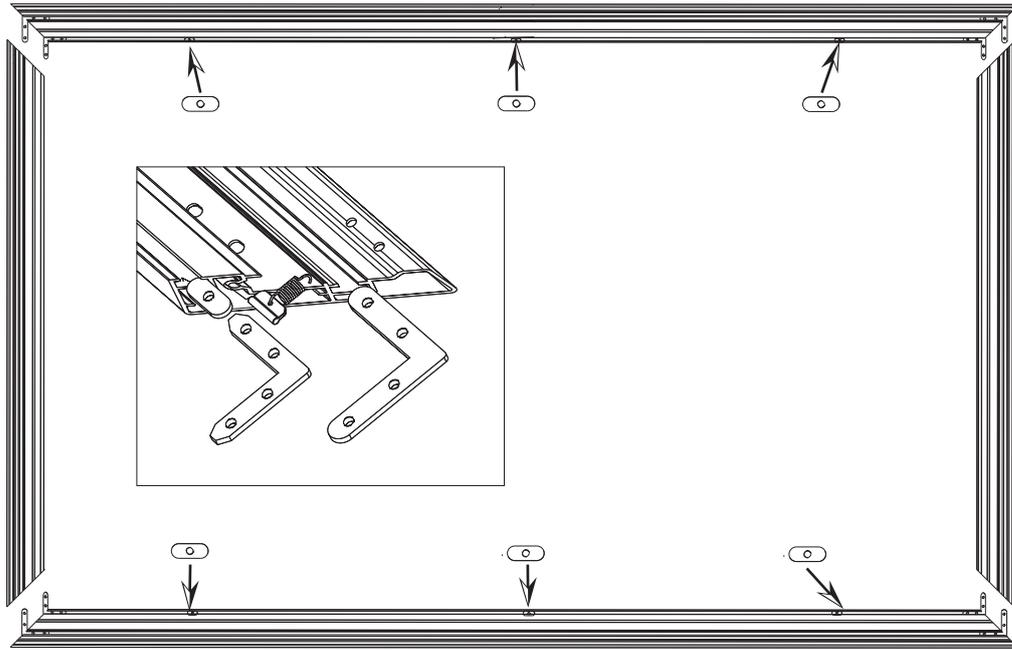

1-2. Springs

Refer to spring sticker on each frames, slide the correct quantity of springs into each frames. Please be noted that the hook on the spring must be nearest the inside frame edge.

1-2


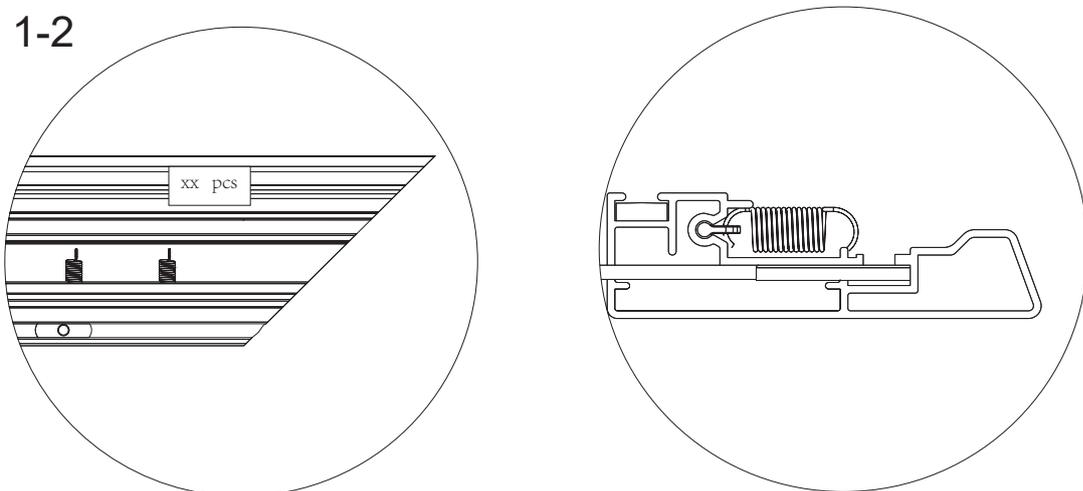


1-3. Four-hole Corner Bracket

Slide 1pcs small (sharp end) and 1pcs big (round end) corner brackets into each side of the long frame as below.



(Please note that the small corner bracket should be in the same groove with the nut.)

1-3

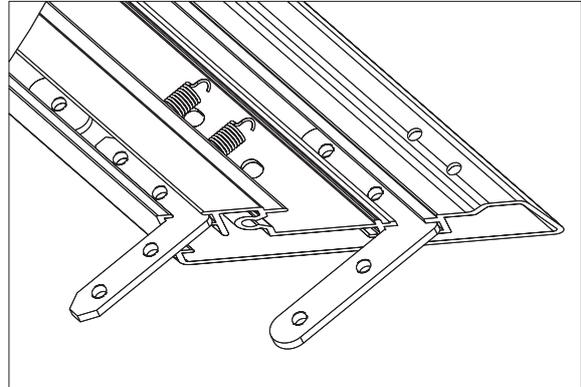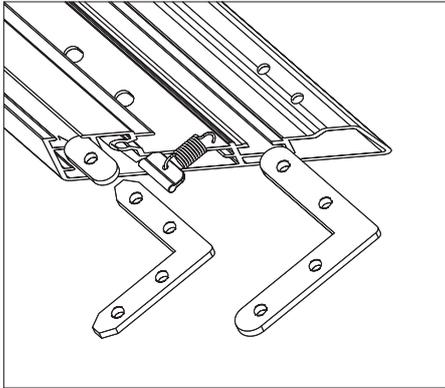


② Frame Assembly:

2-1

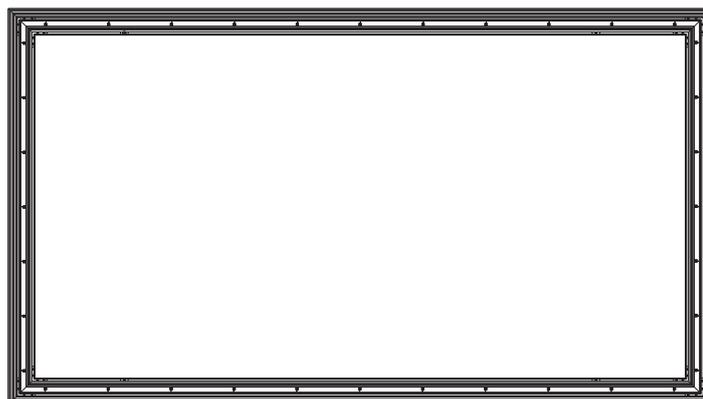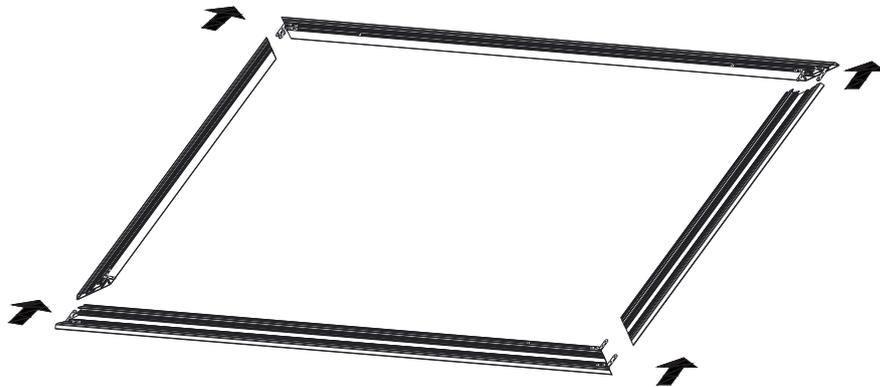

2-2. Secure frame pieces with black round head screws provided.


2-2

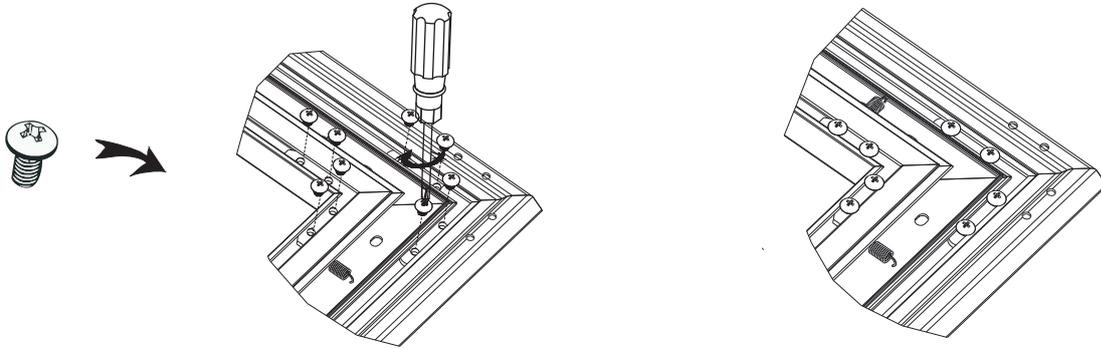


③. Support Bar Assembly

Locate the support bar onto the middle of the retainer plates as below picture and secure it with 2pcs black round head screws provided.

3-1

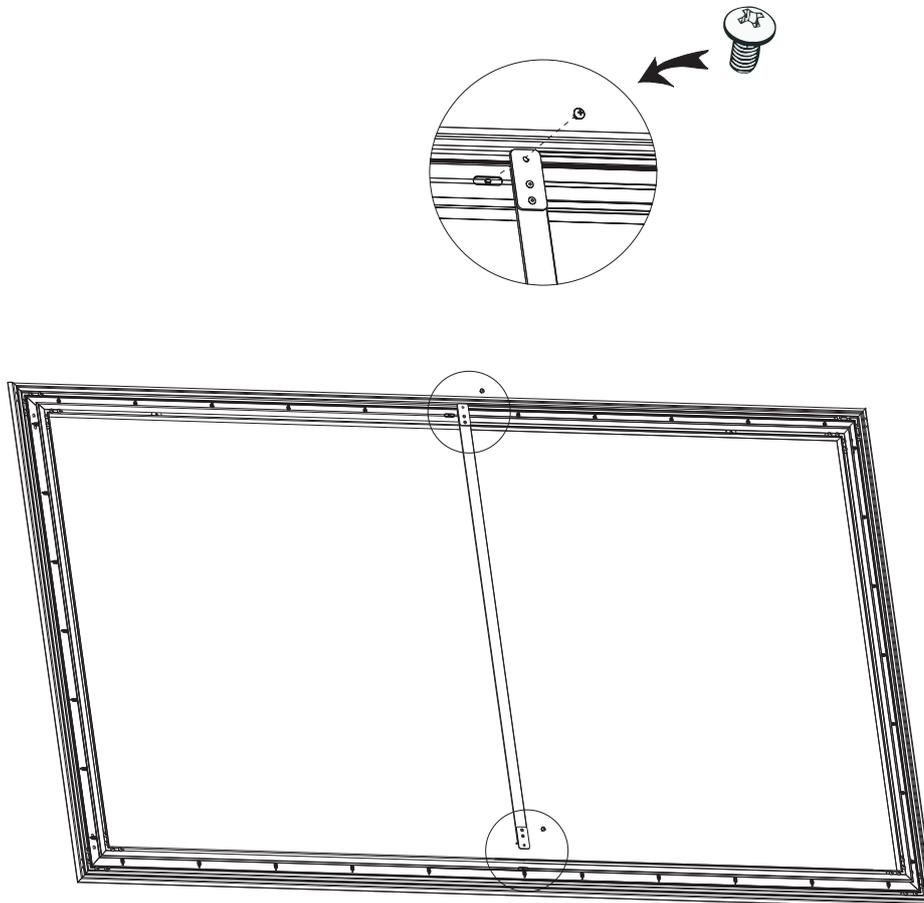

3-2

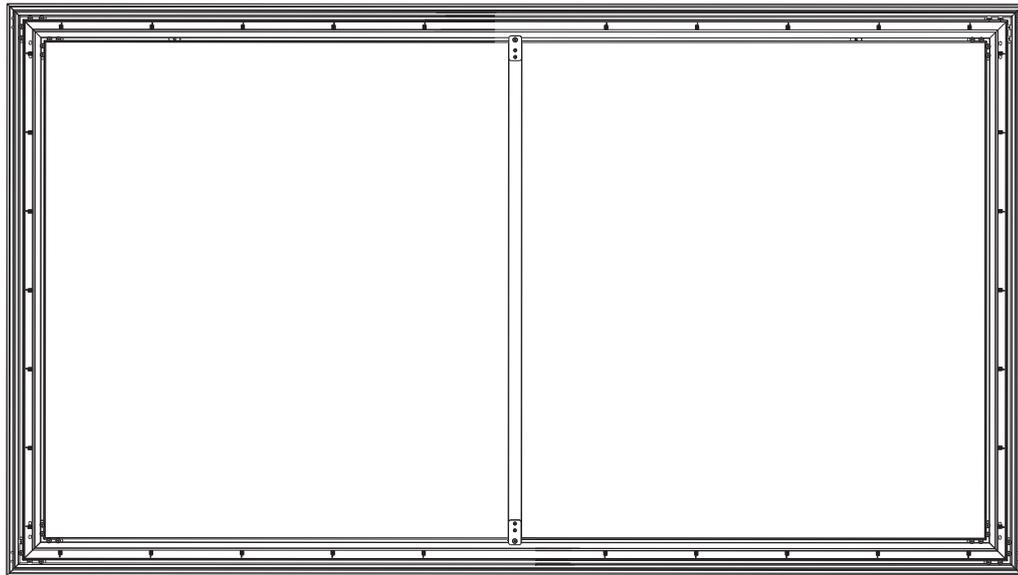


CAUTION: When handling ambient light rejecting screen materials, please remain it flat at all times.

To ensure the flatness, please unroll the screen carefully, do not fold or crease the materials. Any objects are not allowed to rest on or under the materials. **Please wear gloves during all processes.**



④. Screen Materials Attachment

- 1). Locate and smooth out the film sheet (F) on the clean and flat ground, then unroll the screen materials evenly onto the film sheet. Please note that the projection surfaces should be downwards and the back side should be upwards.
- 2). Locate the assembled frame onto the screen materials carefully, meanwhile make sure the distance from every edge of the screen materials to the frame's edge is consistent.
- 3) Slide the springs to align with the eyelets in the screen materials

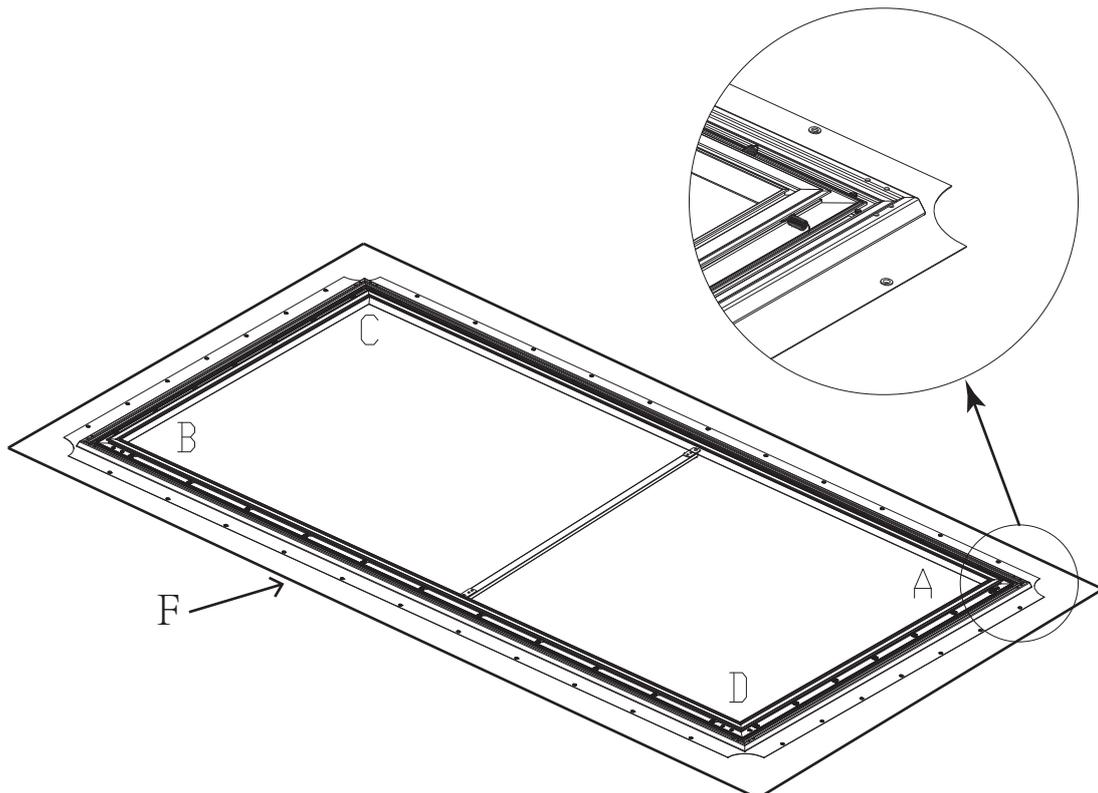


⑤. Secure Screen Materials


1). Fold the edges of the screen materials to the back of the frame.
First to follow the sequence(ABCDEFGG) shown below, secure the materials by hooking with the springs. Then secure the rest of the eyelets with the springs until all eyelets have been secured.

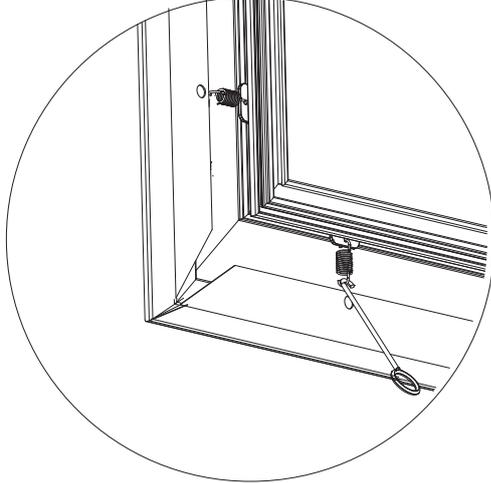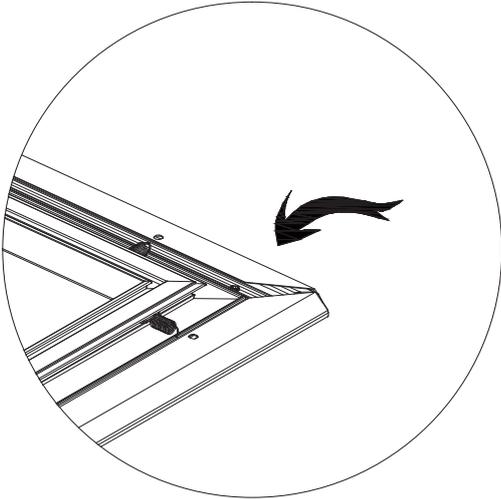


5-1

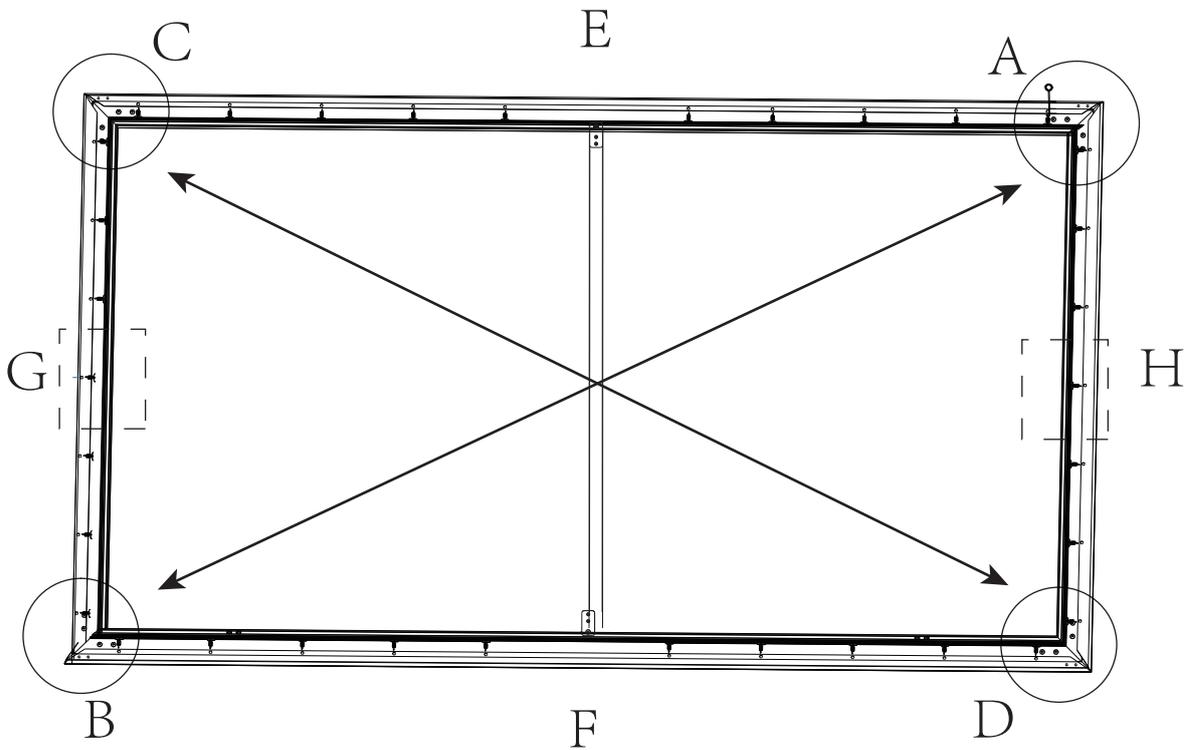

5-2

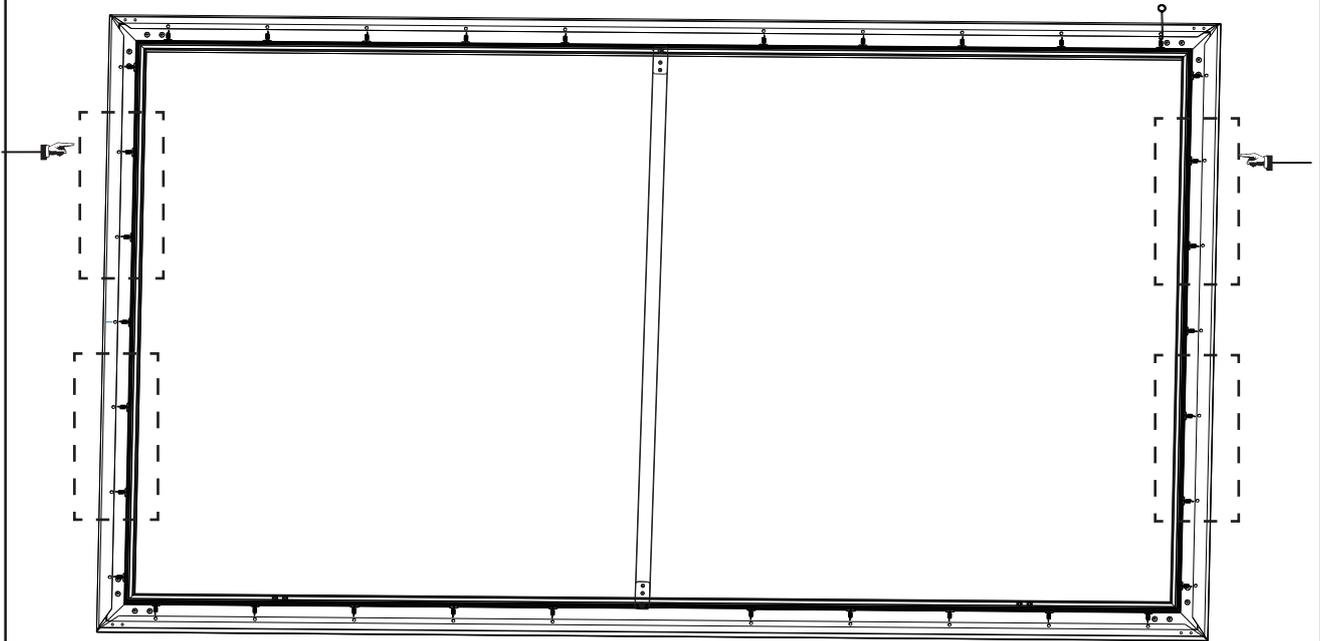


5-3

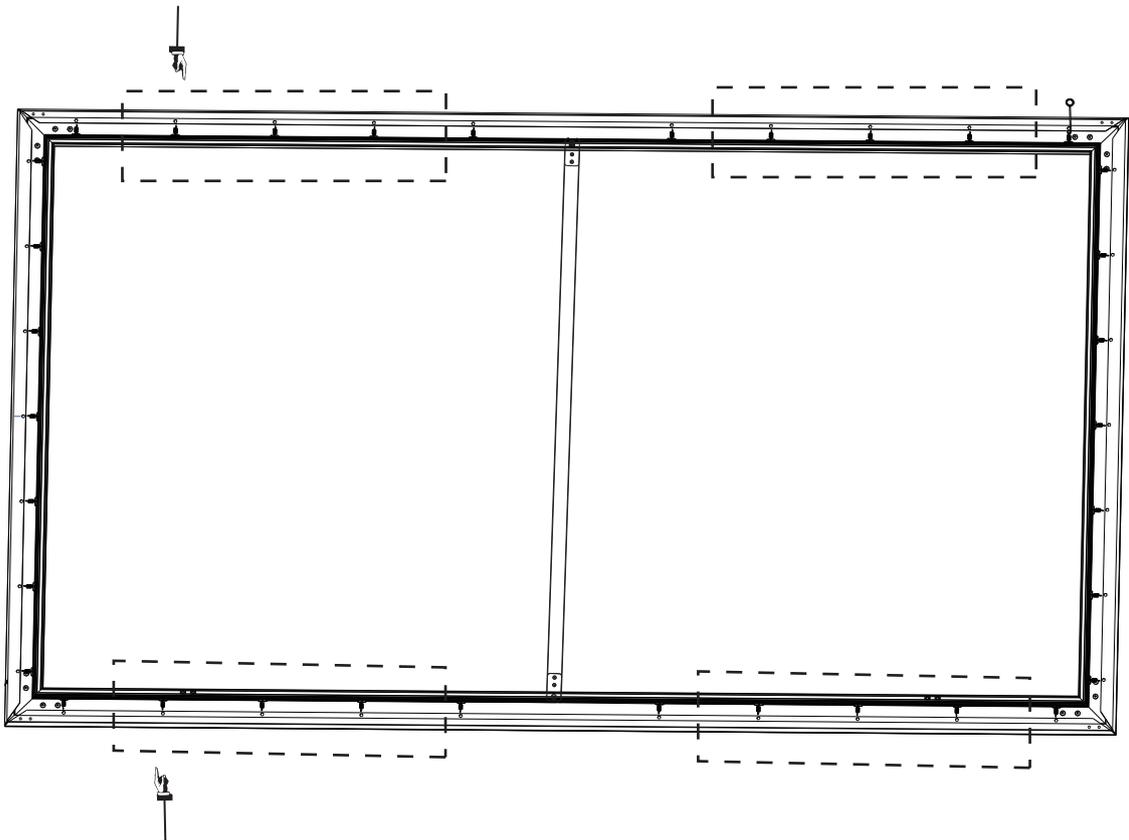


Smooth out the wrinkles through the entire perimeter of the frame's edges by the gloved hands.

5-4


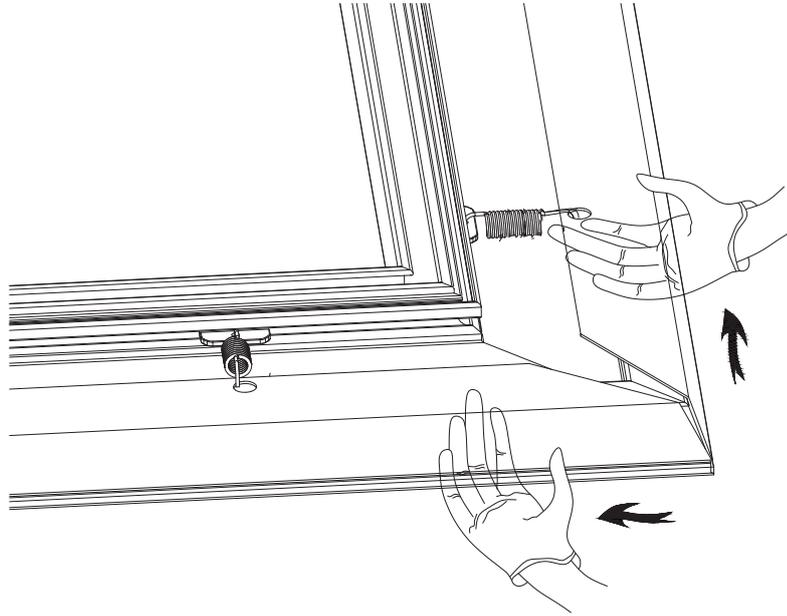


5-5

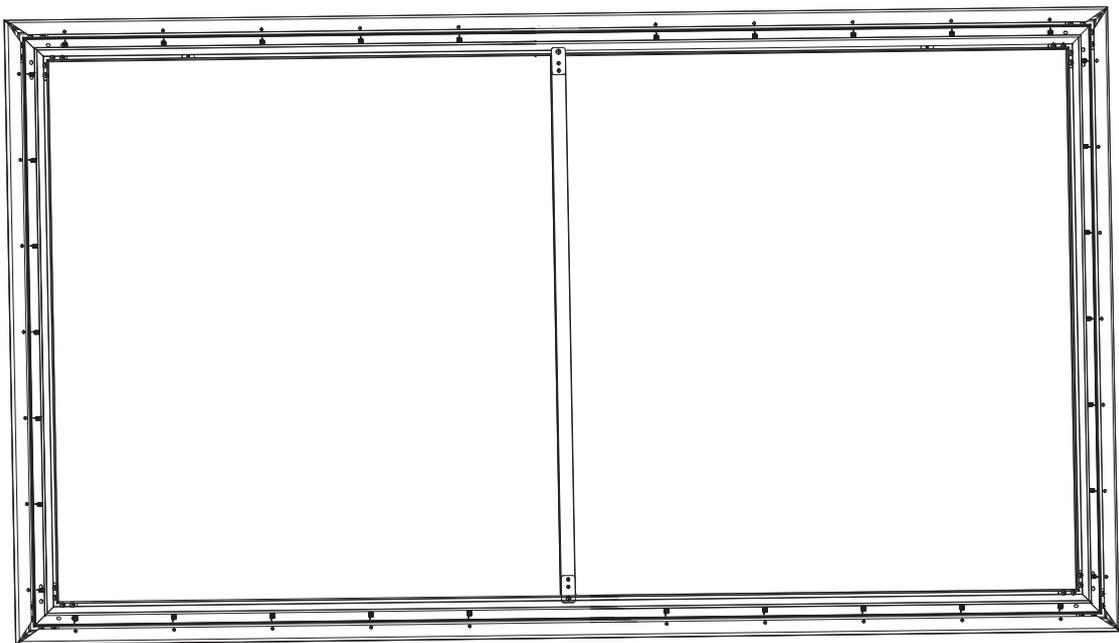


Install decor frame

Slide 3pcs one-hole nuts into each long decor frame;
Slide 2pcs one-hole nuts into each short decor frame;
Then put the decor frames on to each bottom frames.

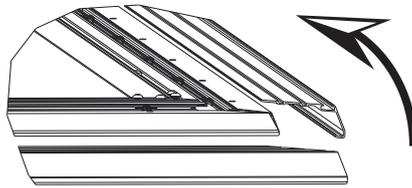
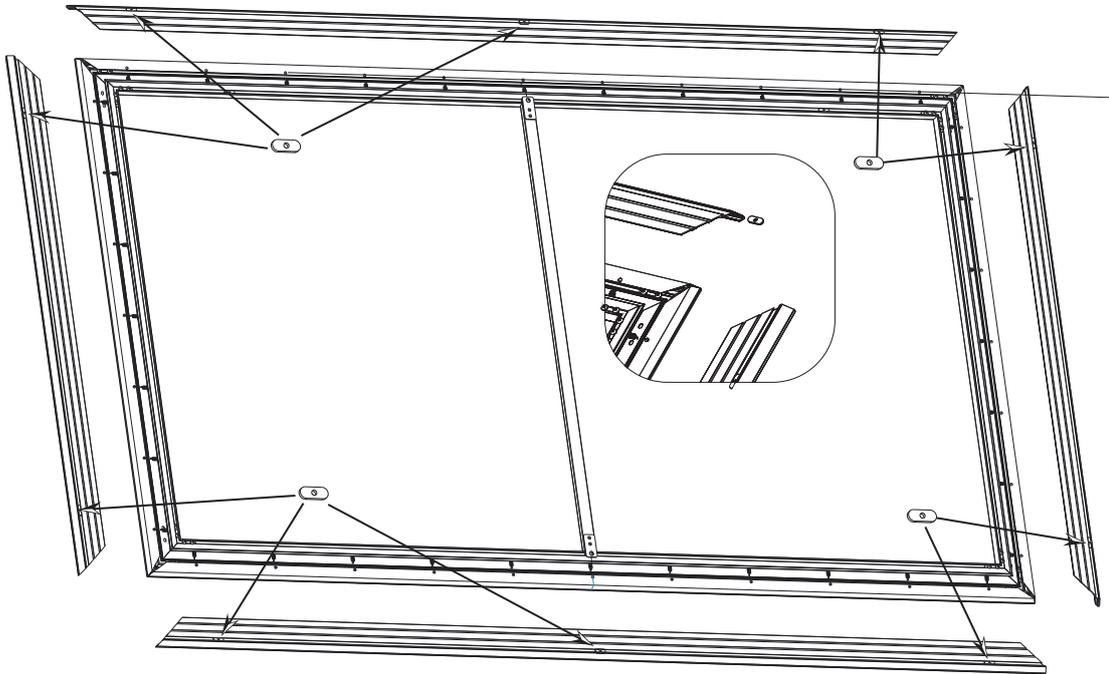


6-2

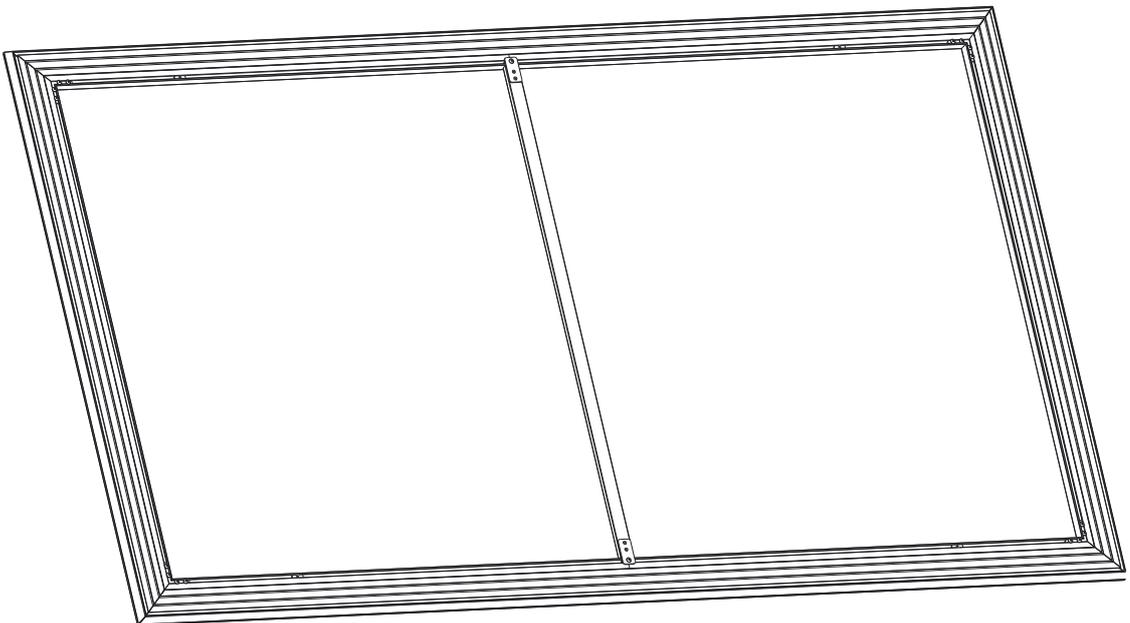


Install the retaining plate
Screw the retaining plates on the one - hole nuts as below pictures.

6-3

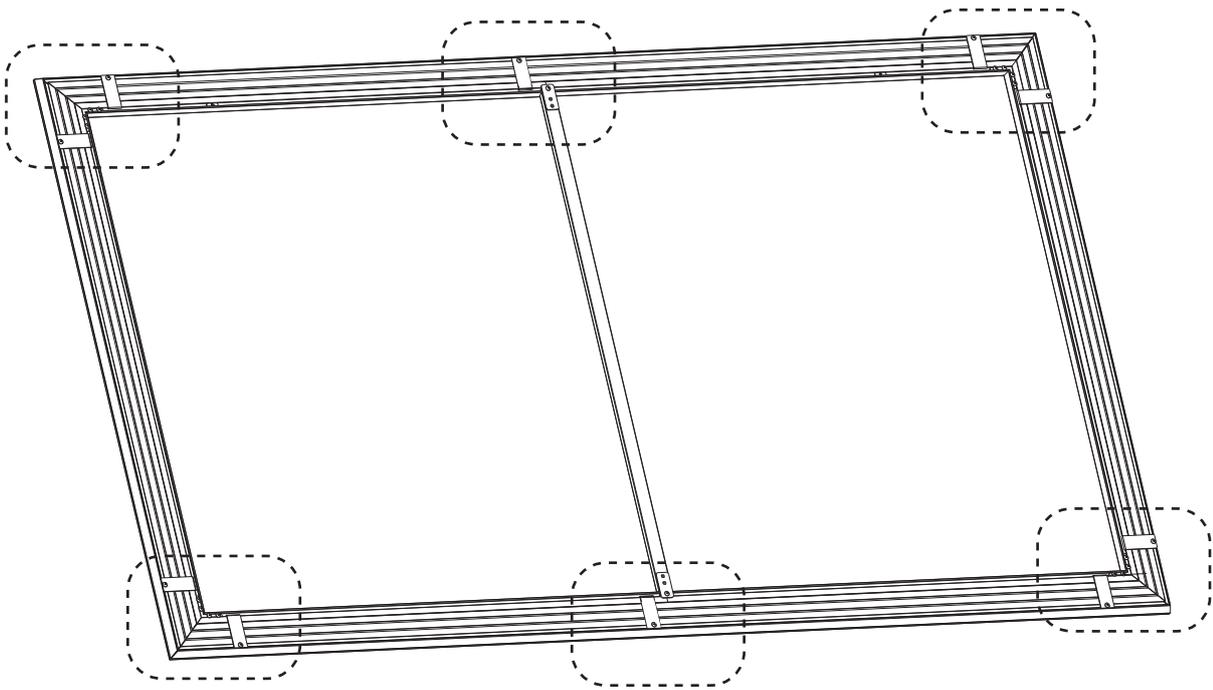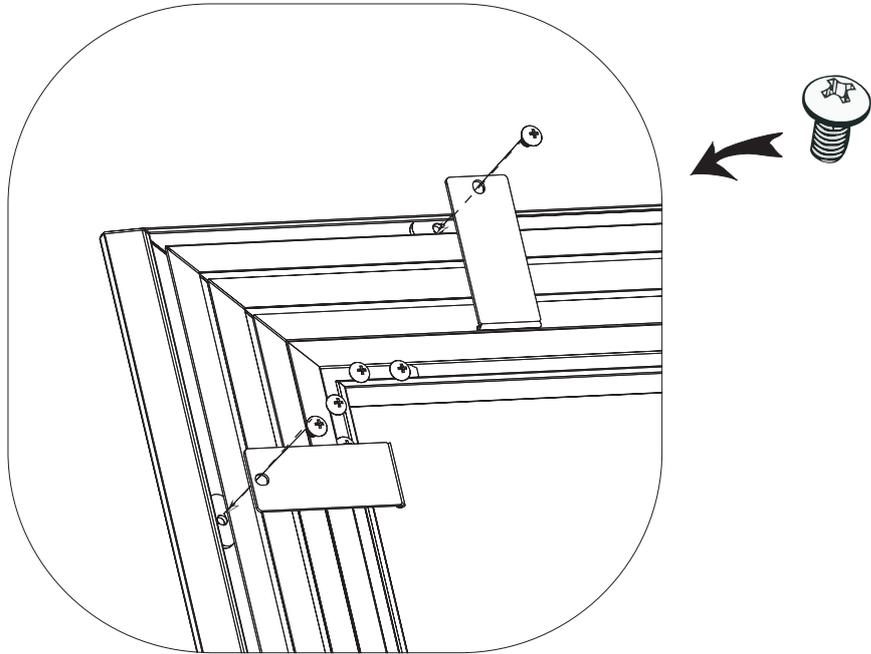


Install the mounting brackets


- 1). Secure two mounting brackets with the 1-hole nut in the top frame by round head screws. Do not tighten the screws completely, the brackets should just can slide left and right.
- 2). Take the same action to secure the circular metal piece to the lower frame, But with flat head screws. Do not tighten the screws completely.

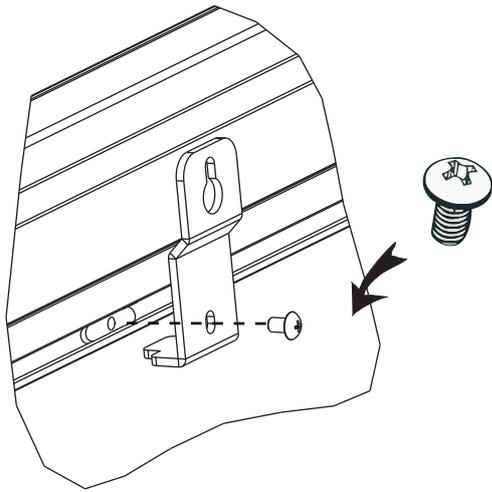

6-1

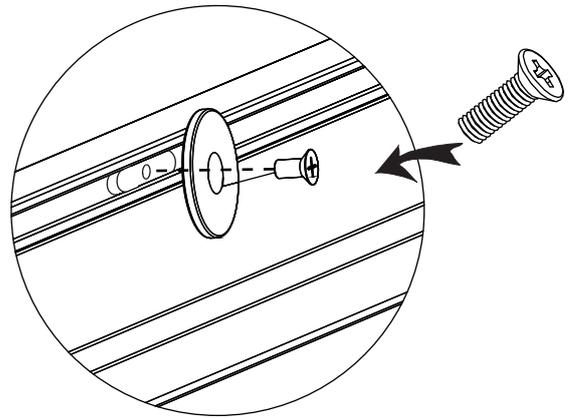


6-2

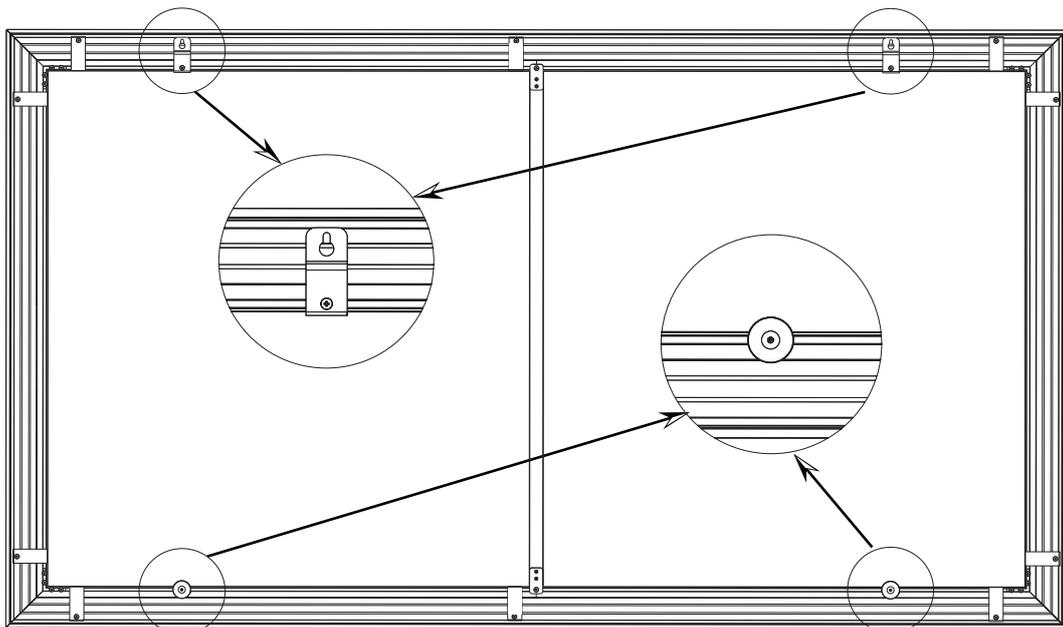


Measure the overall Length (A) and Height (B) of the screen frame.

7-1

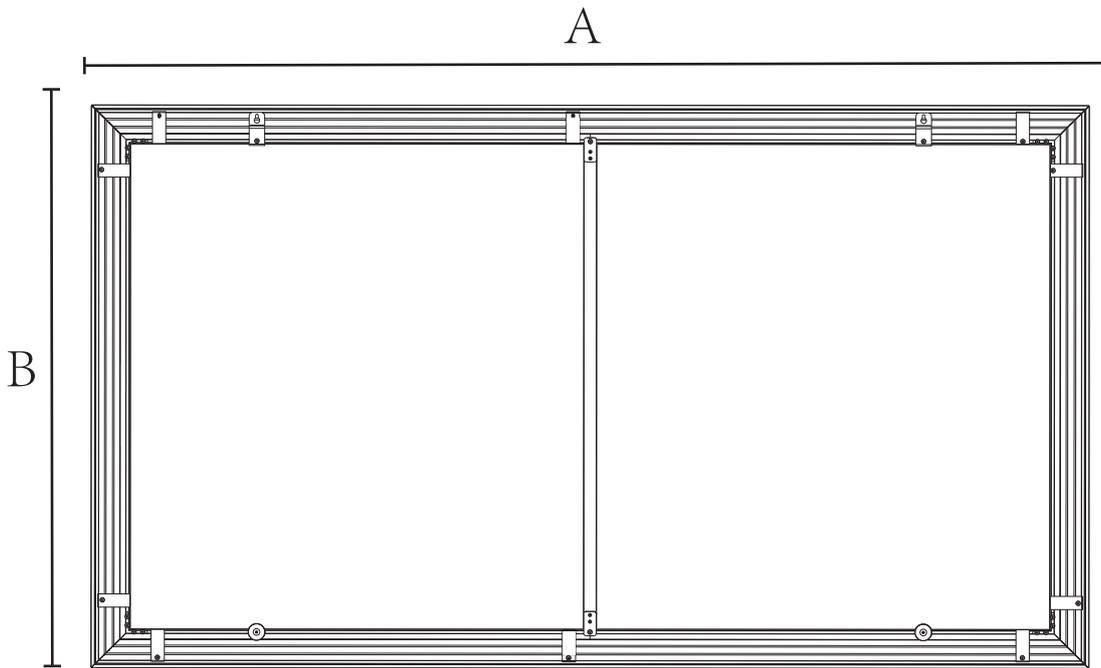

Drill 4 holes in the wall at the desired height. The two holes horizontal distance should be $\frac{2}{3}A$, the vertical distance should be B minus 105mm.

7-2

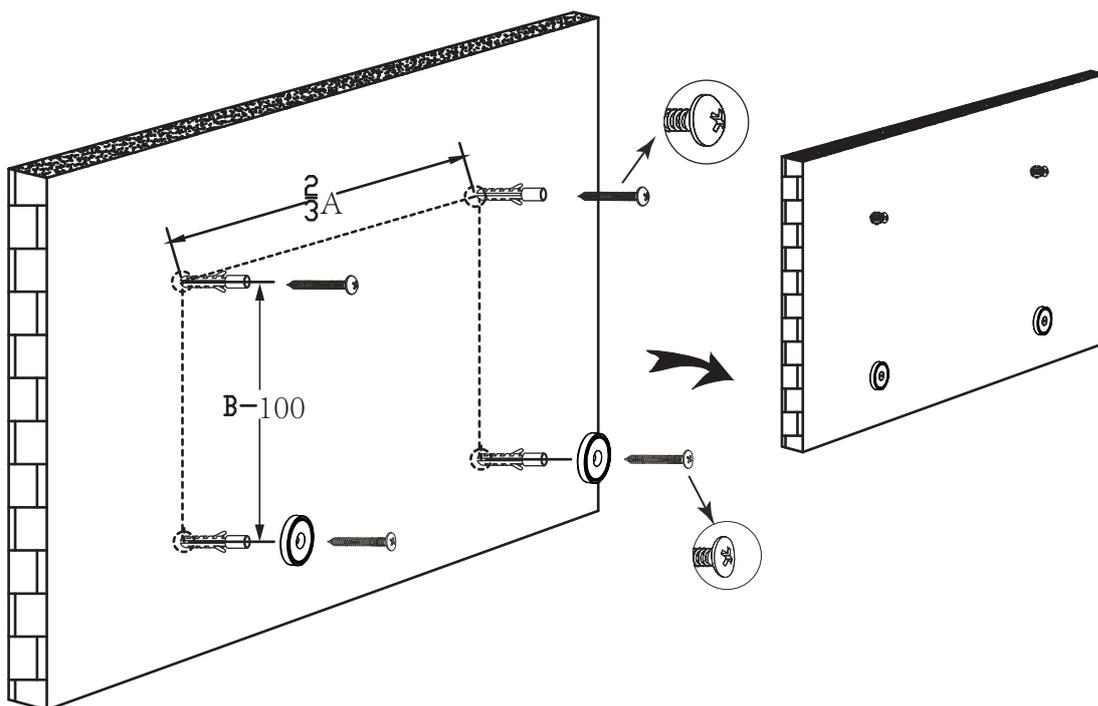

Hammer the expansion bolts into those 4 drilled holes, drive 2pc round head self-tapping screws into the upper expansion bolts and leave 5mm protrusion for hanging the screen on. Install the lower 2pcs magnet pieces by 2pcs flat self-tapping screws supplied. Hang the screen on the upper brackets and attach the lower frame to the wall by the magnets.

